


PET-85



Petrotec

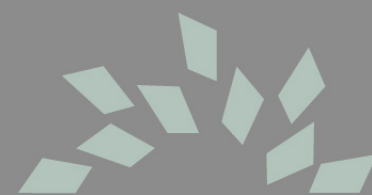

DIMENSIONS:

Height 1160mm
Width 576mm
Depth 470mm

TECHNICAL SPECIFICATIONS:

Building:

Columns: Stainless steel
Frame: Galvanized carbon steel
Panels: Painted steel plate and aluminium

Suction System:

Positive displacement rotary pump
Built in air / vapour separator
Pressure regulator
Cast iron mono-block
130 litre / min. Flow rate (max.)
External, easy to clean, 100 micron filter
Filter has non-return valve to ensure pressure is maintained

Electronic Motor:

Flameproof; Eex and II T3 protection

Flow	50 to 80 l/min - 1Kw	130 l/min.
Power	0,75 Kw 3PH / 1PH	2,2 Kw 3PH / 1,8 Kw 1PH 100 l/min.
Supply	3 x 220V; 3 x 380V; Δ/Y	3 x 220V; 3 x 380V; Δ/Y
Frequency	50Hz	50Hz

Meter:

	3PH	1PH
Max. Flow. (Diesel)	130 l/min.	100 l/min.
Max. Flow. (Petrol)	50 l/min.	50 l/min.

+/- 0,3% accuracy
4 piston, double acting positive displacement
Compatible with most pulse transmitters

Calculator:

Mechanical
Zero re-set facility
Supply measurement capacity 999,9 litres
Totalizer included 9 999 999 litres

Hose:

5/8" - 50 l/min. Flow rate
3/4" - 80 l/min. Flow rate
1" - 130 l/min. Flow rate

Nozzle:

ZVA 4 - 50 l/min.
ZVA 25 - 80 / 130 l/min.

Lightning:

Fluorescent



PET-85 | Industrial mechanical pump, functional and robust.



Petrotec

Headquarters

Parque Industrial de Guimarães, Pav. C2 / S. João de Ponte - 4805-661 GUIMARÃES - PORTUGAL

P. (+351) 253 479 300 F. (+351) 253 479 318

isd@petrotec.pt | www.petrotec.pt

